




LUXX NEWHOUSE GROUP

FRANKE Hob



POI 6 3GAV-D-VT

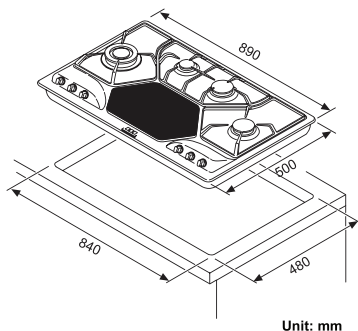


Unit: mm

Specification

6 cooking zone
3 standard gas burner plus 1 triple crown,
G20,natural gas(methane),
factory set VT-Vitroc ceramic hob
Gas burner power left to right by sequence
3.6KW+1.0KW+1.75KW+1.75KW
Glass ceramic plate 2000w dual-ring heating element
Electric ignition system with plug,
Voltage and Frequency :220-240V/50-60Hz
Dimension:890x500mm
Cut out:840x480mm
Build in




FHCR 1204 3G TC WH

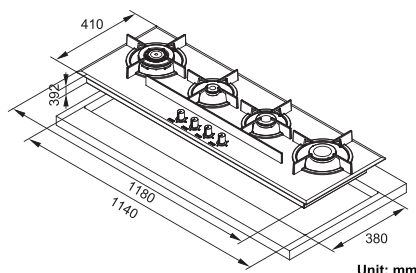


Unit: mm

Specification

Black/white temper glass cooktop
Electric ignition system with plug,
Voltage and Frequency :220-240V/50-60Hz
3 standard gas burner plus 1 triple crown burner
3.6KW+1.0 KW+1.75KW+3.0KW
G20,natural gas(methane)
Dimension:1180x410mm
Cut out:1140x380mm
Build in

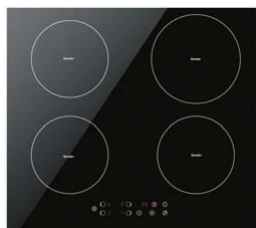

FHF 682 A 604 IT

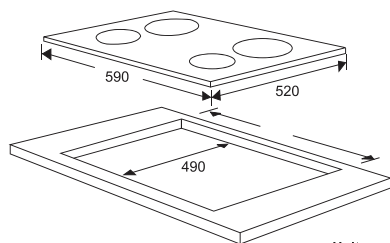

Unit: mm


Specification

Voltage and Frequency :220-240v, 50Hz
4 burners: 2000W+2000W+1500W+1500W,
Schott glass cooktop,
Touch control,
9 levels adjustment,
automatic safety switch off,
boost functionDimensions: 590x520 mm
Cut-out :560x490mm




LUXX NEWHOUSE GROUP

FRANKE Hob

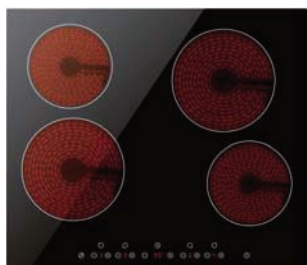


FHF605 604 C T

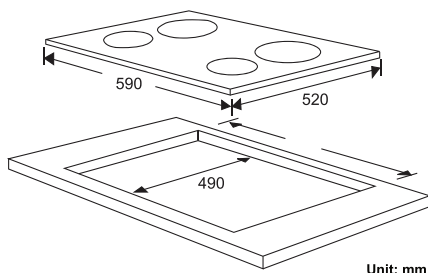


Specification

Voltage and Frequency :220-240V/50-60Hz
4 burners: 1800W+1800W+1200W+1200W,
Schott vitro-glass cooktop,
touch control,
9 levels adjustment,
residual heat indicator,
automatic safety switch off
Dimension: 590x520 mm
Cut out:560x490mm
Build in

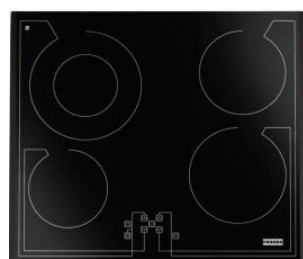

FHB 6004 4C T-S

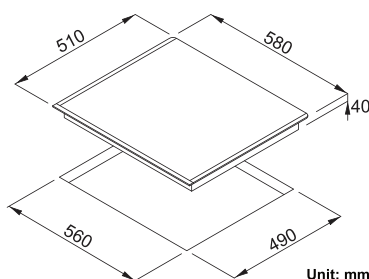


Specification

Touch – slide control ceramic glass hob
4 High light heating zone, total power, 6400w
Left top: ø140mm , 1200w
Left down: ø210/ø120mm , 2200/750w
Right top: ø180mm , 1800w
Right down: ø140mm , 1200w
Voltage and Frequency :220-240V/50-60Hz
Timer programming display
Touch control with acoustic sensor and security blocking
Dimension: 580x510 mm
Cut out:560x490mm
Build in



FHT642L 693I T

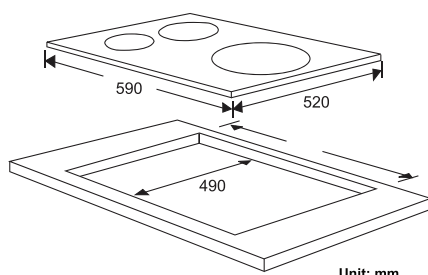


Specification

Voltage and Frequency :220-240v, 50Hz
3 burners:2200W+2000W+1500W ,
Schott glass cooktop,
touch control,
9 levels adjustment,
automatic safety switch off,
boost function
Dimensions: 590x520 mm
Cut out :560x490 mm



FHNE 604 3G TC XS C

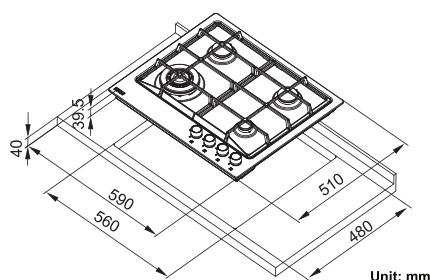

Specification

Stainless steel 304 cooktop
Electric ignition system with plug,
Voltage and Frequency :220-240V/50-60Hz
3 standard gas burner plus 1 triple crown burner
1.75KW+3.6KW+1.75KW+1.0 KW
G20,natural gas(methane),factory set
Dimension:590x510mm
Cut out:550x480mm
Build in




LUXX NEWHOUSE GROUP

FRANKE Hob



FH01A0 753 XS

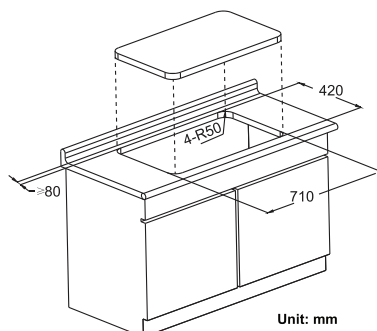


Specification

SUS304 cooktop
2 tripple ring, 1 semi-rapid burners (4.2KWx2+1.8KW)
LPG/NG
Cast iron pan supports
Auto ignition with safety device
Dimension: 750x450 mm
Cut out: 710x420mm
Build in



FH01 BO 753 G

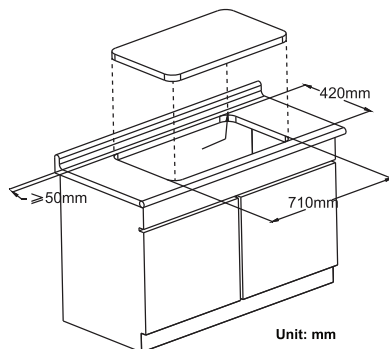


Specification

Temper glass cooktop
Battery ignition system
Burner, tripple ring, semi-rapid (4.2KWx2, 1.8KWx1)
LPG/NG
Cast iron pan supports
Auto ignition with safety device
Dimension: 780x470 mm
Cut out: 710x420mm
Build in



FH10A0 752 XS

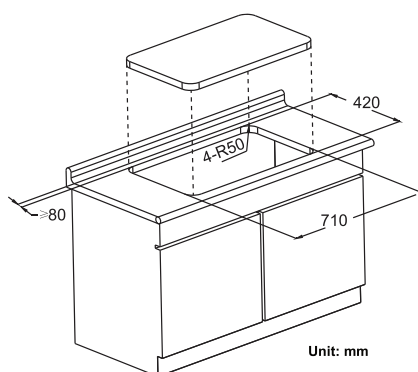


Specification

SUS304 cooktop
2 tripple ring burner (4.2KWx2)
LPG/NG
Cast iron pan supports
Auto ignition with safety device
Dimension: 750x450 mm
Cut out: 710x420mm
Build in



FH27B4 752 G

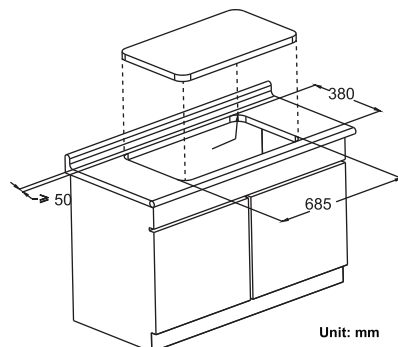

Specification

Temper Glass cooktop
2 tripple ring burner (4.2 KWx2)
LPG/NG
Cast iron pan supports
Auto ignition with safety device
Dimension: 780x460x160 mm
Cut-out: 685x380mm
Build in




LUXX NEWHOUSE GROUP

FRANKE Hob



FHM 302 2 2C M XS

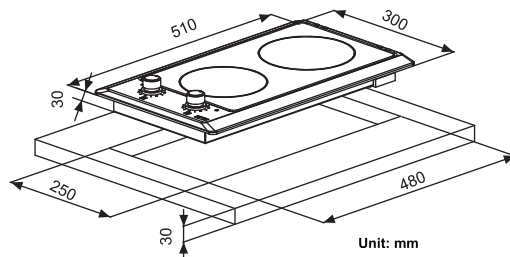


Specification

Electric ceramic glass with touch command
Cooking zone $\Phi 140$, 1200W; $\Phi 160$, 1500W
Voltage and Frequency : 220-240V/50-60Hz
Cooking zone automatic protection
Residual heat indicator
Dimension: 300x510mm
Cut out: 250x480mm
Build in



FHM 301 1 TC XS C

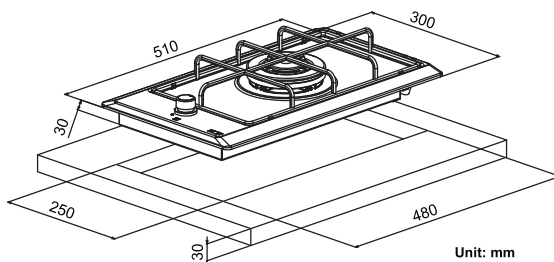


Specification

1 Gas burner (3300W) with triple crown
Integrated electronic switch-on
Safety valve
Cast iron pan supports
G20, natural gas (methane)
Dimension: 300x510mm
Cut out: 250x480mm
Build in



FHM302 2G XS C

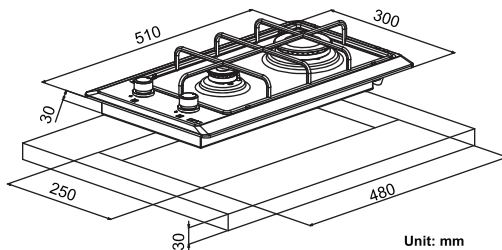

Specification

2 Gas burner, Auxiliary 1000W, Rapid 3000W
Integrated electronic switch-on
Safety valve
Cast iron pan supports
G20, natural gas (methane)
Dimension: 300x510mm
Cut out: 250x480mm
Build in